

02-11-02

A

02/07/02
JC962 U.S. PTO

11046 U.S. PTO
10/072038
02/07/02

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
(Docket No. 17810 (MHM 13503US01))

PATENT APPLICATION OF:

Aaron J. Shuman
John R. Shuey
Neena Sooch
Guy Willems

EXPRESS MAIL NO. EL649153065US

Date: February 7, 2002

SERIAL NO.:

FILED:

FOR: ELECTRICAL CONNECTOR
ASSEMBLY

Assistant Commissioner of Patents
BOX PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of Inventor(s): Aaron J. Shuman, John R. Shuey, Neena Sooch, and Guy Willems

For: ELECTRICAL CONNECTOR ASSEMBLY

1. Enclosed are:

- ☒ 22 pages of specification, which includes a 1 page abstract, and 5 page(s) of claims (Claims 1-16).
- ☒ 15 sheet(s) of drawing(s) (informal).
- ☐ A Combined Declaration and Power of Attorney signed by each inventor.
- ☐ An associate power of attorney.
- ☒ A Transmittal of Information Disclosure Statement and its enclosures.
- ☐ An Assignment and Assignment Recordation Form PTO-1595.

2. Benefit of the filing date of each priority document or U.S. provisional patent application listed below (if any) is claimed under 35 U.S.C. Section 119 and Section 120:

<u>Docket No.</u>	<u>Country</u>	<u>Appl'n.</u> <u>Serial No.</u>	<u>Filing Date</u>
-------------------	----------------	-------------------------------------	--------------------

3. The filing fee has been calculated as shown below, based on the assignee's status as a large entity:

	Claims Presented	Extra Claims	Rate per Extra claim	
Total Claims	16 - 20	0	X \$ 18	\$.00
Indep Claims	4 - 3	1	X \$ 84	\$84.00
Basic fee				\$740.00
Multiple dependent claim presented (\$260 if any present)				\$.00
Total Filing fee				<u>\$824.00</u>

4. The following arrangements have been made to pay the filing fee:

- ☒ A check in the amount of \$824.00 to cover the filing fee is enclosed.
- ☐ The filing fee is not enclosed. This form does not authorize a charge to a deposit account.
- ☐ Please charge our Deposit Account No. 13-0017 in the amount of \$~.
- ☒ The Commissioner is hereby authorized to charge any additional filing fees which may be required under 37 C.F.R. 1.16 for this application and for any amendment thereto, or credit any overpayment to Account No. 13-0017.

5. The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 13-0017.

- ☐ No charges are authorized.
- ☒ Any patent application processing fees under 37 C.F.R. 1.17.


6. Please address all telephone calls to:

Kirk A. Vander Leest at telephone No. (312) 775-8000.

7. Please address all correspondence to:

Tyco Electronics Corporation
4550 New Linden Hill Road
Suite 450
Wilmington, Delaware 19808-2952

Date: February 7, 2002



Kirk A. Vander Leest
Reg. No. 34,036

TITLE

ELECTRICAL CONNECTOR ASSEMBLY

BACKGROUND OF THE INVENTION

[01] The preferred embodiments of the present invention generally relate to electrical connectors with terminal position assurance, latching and keying features. More particularly, a latching connector assembly is provided affording a low vertical profile.

[02] Many conventional connector configurations have been proposed, such as plug-receptacle assemblies for wire-to-wire connections, plug-receptacle assemblies for wire-to-printed circuit board connections (such as in board applications), and plug-device assemblies (such as sensors and the like). Hereafter the terms plug and receptacle shall be used to refer generically to any and all connector applications, including, but not limited to, wire to wire, PCB to wire, plug to device, and the like.

[03] In many applications, several electrical connectors each consisting of a plug and associated receptacle, may be routed to a common area, such as on a vehicle. All of the connectors are connected when the vehicle reaches a designated point along an assembly line. Where several connectors of similar size and shape are provided, a need arises for assembly line personnel to be able to distinguish between connectors to ensure that each plug is inserted into the correct receptacle. In the past, assembly line personnel have experienced difficulties in discriminating each plug and the associated receptacle from other plugs and receptacles.

[04] In the past, the issue of mismatched connector halves has typically been addressed through the use of connector position assurance devices (CPA). A CPA functions to assure an operator that the matable connector halves have been correctly and fully mated. Conventional CPA systems, include a plug housing with a latch formed thereon. The latch slidably receives a CPA, which is mounted to the plug housing and is operable to assure that a further matable connection is fully mated to the housing before the CPA may

be moved to its engaged position. However, conventional CPA and latch assemblies use a CPA carriage structure formed on top of the latch assembly, or visa versa. Stacking the CPA and latch upon one another unduly increases the overall envelope of the connector. With increasing demands being placed on miniaturization of connectors, a need exists to continue to further reduce the outer envelope of the connector device, while still providing a mechanism for assuring that assembly line personnel mate the correct connector assembly components together.

[05] A need remains for improved connector assemblies that overcome the problems discussed above. The preferred embodiments of the present invention described below address the above discussed needs and other disadvantages of conventional connector devices that will become readily apparent from the following description, drawings and claims.

BRIEF SUMMARY OF THE INVENTION

[06] According to certain aspects of an embodiment of the present invention, an electrical connector includes a plug having front end including a mating interface and a rear end. A receptacle has an opening configured to receive the mating interface of the plug. A deflectable latch includes a beam having a front end secured with the front end of the plug housing and a rear, free-standing end which is biasable towards the plug to permit the plug and receptacle to be mated with one another. The latch includes first and second latching projections extending from opposite sides of the beam. First and second latch mating elements are positioned within the receptacle opening to securely engage the first and second latching projections when the plug and receptacle housings are fully mated with one another.

[07] The plug may include a cut out portion underling the rear end of the latch beam for permitting increased inward deflection of the latch beam relative to the plug. The rear end of the latch beam may include a beveled inner face for permitting increased inward deflection of the latch beam relative to the plug.

[08] The first and second latching projections may be longitudinally aligned with one another along the length of the latch beam, or they may be longitudinally offset from one another.

[09] According to certain other aspects of an embodiment of the present invention, a connector housing assembly includes a first plug having a mating interface. A receptacle has an opening configured to receive the mating interface of the first plug. A second plug has a mating interface sized to mate with the receptacle opening. A third plug has a mating interface which is smaller than the receptacle opening and therefore normally insertable into the receptacle opening. First and second keying features of the first plug mate with reciprocal keying features of the receptacle when the first plug is correctly mated with the receptacle. One of the receptacle keying features is configured to prevent the mating interface of the second plug from being fully inserted into the receptacle opening, while the other receptacle keying feature is configured to prevent the mating interface of the third plug from being fully inserted into the receptacle opening.

[10] According to certain other aspects of an embodiment of the present invention, a method is provided for preventing incorrect interconnection of plugs and receptacles in an electrical connector system. The electrical connector system includes a first plug having a mating interface, a receptacle having an opening configured to receive the mating interface of the first plug, a second plug having a mating interface sized to mate with the receptacle opening, and a third plug having a mating interface which is smaller than the receptacle opening and therefore normally insertable into the receptacle opening. A method for preventing the second and third plugs from being mated with the receptacle, comprises providing first and second plug keying features on the first plug which are configured to mate with first and second receptacle keying features on the receptacle. According to the method, one of the receptacle keying features is configured to prevent the mating interface of the second plug from being fully inserted into the receptacle opening, while the other receptacle keying feature is configured to prevent the mating interface of the third plug from being fully inserted into the receptacle opening.

BRIEF DESCRIPTION OF SEVERAL VIEWS OF THE DRAWINGS

- [11] Figure 1 is a top perspective view of a electrical connector assembly according to certain aspects of an embodiment of the present invention.
- [12] Figure 2 is a bottom perspective view of the electrical connector assembly of Figure 1.
- [13] Figure 3 is an elevation view of the connector assembly of Figure 1 showing a plug mated to a receptacle.
- [14] Figure 4 is a bottom cross-sectional view along line Z-Z of Figure 3, showing the plug disengaged from the receptacle.
- [15] Figure 5 is a cross-sectional view from the same perspective as Figure 4, showing the plug partially engaged into the receptacle.
- [16] Figure 6 is a cross-sectional view from the same perspective as Figure 4, showing the plug fully engaged into the receptacle.
- [17] Figure 7 is a top front perspective view of a plug housing from the plug shown in Figure 1.
- [18] Figure 8 is a bottom rear perspective view of the plug housing of Figure 7.
- [19] Figure 9 is a front elevation view of the plug housing of Figure 7.
- [20] Figure 10 is a rear elevation view of the plug housing of Figure 7.
- [21] Figure 11 is a cross-sectional view along line D-D of Figure 9.
- [22] Figure 12 is a cross-sectional view along line E-E of Figure 9.
- [23] Figure 13 is a front elevation view of the plug of Figure 1.
- [24] Figure 14 is a cross-sectional view along line A-A of Figure 13, showing the TPA in its preset position.
- [25] Figure 15 is a cross-sectional view similar to Figure 13, but illustrating the TPA fully engaged with the plug housing.
- [26] Figure 16 is a top front perspective view of a terminal position assurance device (TPA) from the plug of Figure 1.

- [27] Figure 17 is a top rear perspective view of the TPA of Figure 16.
- [28] Figure 18 is a side elevation view of the TPA of Figure 16.
- [29] Figure 19 is a bottom cutaway elevation view of the TPA of Figure 16.
- [30] Figures 20A-20D are a sequence of exploded views illustrating assembly of a plug from the electrical connector assembly of Figure 1.
- [31] Figures 21-24 are mating end views of plugs and receptacles illustrating certain keying features of the electrical connector.
- [32] Figure 25 is a cross-sectional view of a 1x6 plug mated with a 1x6 receptacle.
- [33] Figure 26 is a cross-sectional view illustrating the manner in which certain keying features of the electrical connector function.
- [34] The foregoing summary, as well as the following detailed description of the preferred embodiments of the present invention, will be better understood when read in conjunction with the appended drawings. For the purpose of illustrating the preferred embodiments of the present invention, there is shown in the drawings, embodiments which are presently preferred. It should be understood, however, that the present invention is not limited to the arrangements and instrumentality shown in the attached drawings.

DETAILED DESCRIPTION OF THE INVENTION

- [35] Referring now to Figures 1 and 2, an electrical connector 10 constructed in accordance with certain aspects of the present invention includes a plug 12 and a receptacle 14. The plug 12 includes a housing 16 (see additionally Figures 7-12) having a front or mating end 18 and a rear end 20. The housing includes a top wall 22, a bottom wall 24, and first and second side walls 26, 28 which define a mating interface 30 on the front end 18 of the housing 16.
- [36] The receptacle 14 includes a front or mating end 31 and a rear end 32. The front end 31 of the receptacle 14 presents an opening 33 which is sized to receive the mating interface 30 of the plug 12. The opening includes a top wall 34, a bottom wall 35 and first and second side walls 36, 37. The receptacle 14 includes a plurality of electrical

terminals in the form of contact pins 38 positioned in the receptacle opening 33. The receptacle pins 38 are configured and positioned to extend through reciprocal terminal openings 40 formed on the front face of the plug 12 when the plug 12 is mated with the receptacle 14. The receptacle pins 38 pass through the openings 40 and engage with reciprocal electrical contact terminals 42, which are contained within the plug housing 16. The rear ends of the plug terminals 42 are connected to electrical conductors 44, such as wires, from a wiring harness or another device (not shown). The terminals 38, 42 are arranged in a predetermined pattern of rows and columns, as is common in the art. In the art, such connectors are typically referenced as AxB connectors, where A represents the number of rows of terminals and B represents the number of terminals in each row. In the illustrated embodiment, the plug 12 and receptacle 14 each include a single row of 4 (four) terminals. Hence, the illustrated electrical connector is a 1x4 connector. It will be appreciated, however, that the present invention is equally applicable to other connector sizes.

[37] The plug 12 includes a latching member 48 formed on one side thereof. The latching member 48 may be formed on the top, bottom or either side wall of the plug housing 16, but is preferably formed on one of the side walls 26, 28. In the illustrated embodiment, the latching member 48 is formed on the first side wall 26 of the plug housing 16. The latching member 48 may be formed integrally with the plug housing 16. Alternatively, the latch member 48 may be mounted to the plug housing 16 as a separate unitary structure affixed to the plug housing 16 in any of several manners, such as through adhesive, glue, snaps, screws and other fastening means.

[38] The latching member 48 includes a beam 50 which extends longitudinally along the first side wall 26 of the plug housing 16. The beam 50 has a front end 52 secured with the front end 18 of the plug housing 16. The beam 50 has a rear, free standing end 54, which is normally laterally spaced from the plug housing 16. The rear end 54 of the beam 50 is biasable inward towards the plug housing 16 to permit the plug 12 and receptacle 14 to be mated with one another. The latch beam 50 includes first and second opposed latching projections 56, 58 extending from opposite sides of the latch beam 50. In the illustrated embodiment, the latch projections 56, 58 are longitudinally aligned with each other along the length of the beam 50. It will be appreciated, however, that the latch

projections 56, 58 could be longitudinally offset from each other. First and second latch mating elements 60, 62 are formed within the receptacle opening 36. The first and second latch mating elements 60, 62 are positioned to securely engage the first and second latching projections 56, 58 when the plug 12 is inserted into the receptacle opening 33. In the illustrated embodiment, the latch mating elements 60, 62 are in the form of protrusions which extend inwardly from the first side wall 36 of the receptacle opening 33. It will be appreciated, however, that the latch mating elements 60, 62 could take other forms, such as indentations formed in the side wall of the receptacle opening 33.

[39] The latching member 48 of the illustrated embodiment provides several advantages. By positioning the latching member 48 on the side of the plug 12, as opposed to the top or bottom, the overall height of the plug, and hence the connector 10 is reduced. In this respect, the overall height of the latching member 48, as measured between the outer edges of the latching projections 56, 58, is preferably substantially the same as the height of the mating interface 30 of the plug 16. In addition, the single beam design with opposed latching projections 56, 58 enables the area of latch engagement to be maximized for a given height restriction.

[40] Referring additionally to Figures 3-6, operation of the latching mechanism will be explained in greater detail. When the mating interface 30 of the plug 12 is inserted into the receptacle opening 33, the front end 52 of the beam 50 slides into a gap 68 (see Figure 1) formed between the latch mating elements 60, 62. The plug 12 is pushed inwardly into the receptacle opening 33 until the front faces of the latching projections 56, 58 engage against the latch mating elements 60, 62. The front faces of the latch projections 56, 58 and the reciprocal projections in the receptacle may be beveled (as shown) to ease the insertion of the plug 12 into the receptacle 14. As the plug 12 continues to move inwardly into the receptacle 14, the latch mating elements 60, 62 exert forces against the latch projections 56, 58, which biases the rear end 54 of the beam 50 inwardly towards the side wall 26 of the plug housing 16. The plug's mating interface 30 continues to move inwardly until the rear ends of the latch projections 56, 58 move beyond the rear ends of the latch mating elements 60, 62. Once the latch projections 56, 58 move inwardly beyond the latch mating elements 60, 62, the rear end 54 of the latch beam 50

springs outwardly to its first position thereby locking the plug 12 into the receptacle 14. (See Figure 6).

[41] As can be seen in Figure 4, the first side wall 26 of the plug housing 16 includes a cut out portion 72 which underlies the rear end 54 of the latch beam 50. The cut out portion 72 functions to allow increased inward deflection of the latch beam 50 relative to the plug housing 16. In addition, the rear end 54 of the latch beam 50 includes a beveled inner face 74 which also functions to permit increased inward deflection of the latch beam 50 relative to the plug housing 16. The rear end of the latch beam 50 include a handle 76 for operating the latch member 48. As can be seen in Figure 6, the handle 76 is positioned outside of the receptacle 14 when the plug 12 is mated with the receptacle. The handle 76 can be depressed to move the latch beam 50 inwardly to allow the plug 12 to be removed from the receptacle 14. A shroud 77 is formed around the rear end 54 of the latch beam 50. The shroud 77 includes top and bottom walls 78, 79 which overlie the rear end of the beam 50. The shroud functions to protect the portion of the latch mechanism 48 which would otherwise be exposed when the plug 12 and receptacle 14 are mated together. Shroud 77 also serves as an overstress feature preventing overstressing of the latch if deflected outwardly from the plug housing.

[42] The plug 12 includes the housing 16 (see Figures 7-15) and a terminal position assurance device (TPA) 80 (see Figures 17-19) which is configured to mate with the plug housing (see Figures 20A-20D). As was discussed above, the plug housing 16 includes a top wall 22, a bottom wall 24 and first and second opposed side walls 26, 28. Terminal receiving passages 82 extend between the front and rear ends 18, 20 of the housing 16 (see Figures 11 and 12). Each passage 82 is configured to receive and support one of the plug terminals 42 within the housing 16. The passages present openings 84 in the front end 18 of the housing 16, which are arranged in a predetermined pattern to allow the plug terminals 42 to mate with the receptacle pins 38 when the plug 12 is inserted into the receptacle 14. The passages 82 also include rear openings 85 which are configured to allow the terminals to be inserted into the plug housing 16 during assembly of the plug 12, as is explained in greater detail below.

[43] As can be seen in Figure 12, each passage 82 includes a latching member 86 for securing the plug terminal 42 within the passage. The latch member 86 includes an arm or beam 88 extending longitudinally within a respective passage 82. The beam 88 has a rear end 90 connected to housing 16 at the rear end of the passage 82 and front, free standing end 92 which can be pivoted towards the upper wall of the passage 82 to allow a plug terminal 42 to be inserted into the passage 82.

[44] Referring to Figures 12-15, the manner in which the terminals 42 are installed in the housing will be explained. During assembly, the plug terminals 42, which have previously been secured to the conductors 44, are inserted into the passages 82 through the rear openings 85. As can be seen in Figure 17A, each of the plug terminals 42 includes a front portion 94, which is configured to receive a receptacle pin 38, and a rear portion 96, which is configured to be secured to one of the conductors 44. As a plug terminal 42 is inserted into one of the passages 82, the front portion 94 of the terminal 42 engages against the bottom of the latch beam 88. The lower face of the latch beam 88 may be beveled as shown to ease insertion of the terminal 42 into the passage 82. Continued inward movement of the plug terminal 42 biases the latch beam 88 upwardly. The plug terminal 42 continues to move inwardly into the passage 82 until its front portion 94 moves inwardly of a locking finger 98 formed on the front end 92 of the latch beam 88. Once the front portion 94 of the terminal 42 moves beyond the latching finger 98, the latch beam 88 springs downwardly to secure the terminal 42 within the passage 82, as is shown in Figures 14 and 15. The terminal 42 is restrained in the passage 82 between the locking finger 98 and a protrusion 100 formed on the front end of the passage 82.

[45] Referring to Figures 16-19, the TPA 80 has a front wall 102, and top and bottom opposed latching members 104, 106 extending from the front wall. The top and bottom latching members 104, 106 are configured to secure the TPA 80 to plug housing 16 for movement between a first or preset position (see Figure 20C) and a second or fully engaged position (see Figure 20D). The front wall 102 carries the terminal opening 40. When the TPA 80 is in its fully engaged position, the terminal openings 40 align with and overly the front openings 84 of the passages 82.

[46] The bottom latching member 106 includes a pair of bottom legs 108 which are connected at their distal ends by a cross member 110. The bottom latching member 106 is configured to slide into a reciprocal recess 112 formed in the bottom wall 24 of the plug housing 16, as is shown in Figures 20A-20D. A longitudinal slot 114 extends between the bottom legs 108. The longitudinal slot 114 is configured to mate with first and second longitudinally spaced latching protrusions 116, 118 (see Figure 8), which are formed in the recess 112, for allowing the TPA 80 to be secured to the housing 16 at its preset and fully engaged positions, as is explained below.

[47] The top latching member 104 of the TPA 80 includes a plurality of top legs 120 (three in the illustrated embodiment). The top legs 120 are insertable into top passage 121 in the plug housing 16. The top passage 121 overlies and opens into the terminal passages 82. The top legs 120 present downwardly extending protrusions 122. Each of the protrusions 122 is positioned to align with and extend downwardly into one of the terminal passages when the TPA 80 is moved to its fully engaged position. (See, e.g., Figure 15).

[48] Assembly of the plug will now be explained with reference to Figures 14, 15 and 20A-20D. The TPA 80 is secured to the plug housing 16 by initially sliding the distal end 123 of the bottom latching member 106 into the recess 112. As the TPA 80 slides farther onto the plug housing 16, the distal end 124 of the top latching member 104, e.g., legs 120, move into the top opening 121. The proximal ends of the bottom legs 108 include beveled flanges 126 on their outer edges. The beveled flanges 126 are configured to mate with reciprocal grooves 128 formed in the side walls of the recess 112. As the TPA 80 slides onto the housing 16, the beveled flanges 126 engage in the grooves 128. The TPA 80 continues to slide onto the housing 16 until the distal cross member 110 engages against the first latching protrusion 116. (See Figure 20B). Continued inward movement of the TPA 80 biases the cross member 110 up and over the first latching protrusion 116. The outer face of the first latching protrusion 116 is beveled to assist in lifting the cross member 110 over the protrusion 116. The interface between the beveled flanges 126 and the grooves 128 creates a pivot point for the bottom legs 108 as the cross member 110 moves past the first latching protrusion 116.

[49] Once the distal cross member 110 moves past the first latching protrusion 116, the distal portions of the bottom legs 108 snap back into the recess 112. (See Figure 20C). This position corresponds to the preset position of the TPA 80. When the TPA is at its preset position, the first latching protrusion 116 is captured in the longitudinal slot 114, and the cross member 110 is longitudinally positioned between the first and second latching protrusions 116, 118. Outward movement of the TPA 80 relative to the plug housing 16 is restricted by the interface between the cross member 110 and the first latching protrusion 116, whereas inward movement of the TPA 80 relative to the plug housing 16 is restricted by the interface between the cross member 110 and the second latching protrusion 118.

[50] As can be seen in Figure 14, when the TPA 80 is at its preset position, the top legs 120 are disengaged from the latch arms 88. Hence, when the TPA is in its preset position, the plug terminals 42 can be inserted into the passages 82, as was explained above.

[51] Once the terminals 42 are installed into the housing 16, the TPA 80 is moved to its fully engaged position to lock the terminals 42 into the housing 16. (See Figures 15 and 20D). As the TPA 80 moves from its preset position (Figures 14 and 20C) to its fully engaged position (Figures 15 and 20D), the protrusions 122 move into the passages 82 and engage against the tops of the terminals 42. The protrusions 122 exert downward forces on the terminals 42, which pushes the terminals down into the passages 82.

[52] As the TPA 80 slides inwardly towards its fully engaged position, the distal cross member 110 engages against the second latching protrusion 118. The cross member 110 slides up and over second latching protrusion 118. Once the distal cross member 110 moves past the second latching protrusion 118, the bottom legs 108 snap back into the recess 112 to secure the TPA 80 to the housing 16 at its fully engaged position. (See Figures 15 and 20D). When the TPA 80 is in its fully engaged position, the second latching protrusion 118 is captured in the longitudinal slot 114. Outward movement of the TPA 80 relative to the plug housing 16 is restricted by the interface between the distal cross member 110 and the second latching protrusion 118, whereas inward movement of the TPA 80 relative to the plug housing 16 is restricted by the interface between the front wall 102 of the TPA and the front of the housing 16.

[53] As the TPA 80 is moved from its partially engaged position to its fully engaged position, the distal ends 124 of the top legs 120 move into the space 130 between the latch beams 88 and the top wall 22 of the housing 16. (See Figures 14 and 15). When the TPA is fully engaged on the housing, the distal ends of the legs extend into the space 130 to restrict upward movement of the latch beams 88 sufficiently to prevent the terminals 42 from being withdrawn from the passages 82.

[54] The plug 12 and receptacle 14 include first and second integral keying features which are adapted to mate with one another when the plug correctly is inserted into the receptacle. The keying features function to ensure proper orientation between the plug 12 and receptacle 14 before permitting full mating engagement therebetween. In addition, one of the keying features functions to prevent other plugs, which have the same size mating interface as the plug 12, from being inserted into the receptacle 14. The other keying feature functions to prevent plugs, which have smaller mating interfaces than does the plug 12, from being inserted into the receptacle 14. The combination of the first and second keying features is beneficial for ensuring that the proper plugs and receptacles are connected together, which is particularly advantageous in applications where multiple electrical connectors are located in a common area of a system.

[55] One of the keying features is formed on the second side walls of the plug and receptacle opening, opposite the latch mechanism. The other keying feature may be formed on either the top or bottom walls of the plug and receptacle opening. In the illustrated embodiment, the first keying feature consists of mating ribs 140, 142 and slots 144, 146 formed on the second side walls 28, 37 of the plug 12 and the receptacle opening 33. (See Figures 1 and 21). Similarly, the second keying feature consists of mating rib 148 and slot 150 formed on the bottom walls 24, 38 of the plug 12 and the receptacle opening 33.

[56] In a system having multiple plugs and receptacles of the same size, e.g. a plurality of 1x4 connectors assemblies, unique first keying features may be provided for each plug-receptacle combination. This is illustrated in Figures 21-24, which shows mating end elevation views of four different 1x4 connector assemblies 10A-10D. Each connector assembly includes a plug 12A-12D and a receptacle 14A-14D, respectively. The plug-

receptacle connector assemblies 10A-10D have the same general construction to each other (and to that of the above described connector assembly 10), except for the specific construction of the first keying feature for a given connector assembly. In particular, each plug-receptacle connector assembly has a unique first keying feature formed on the second side walls 28, 37 of the plug and receptacle. This first keying feature functions to ensure that the plug and receptacle for a given connector assembly mate with one another in the correct orientation. In addition, this first keying feature prevents plugs of the same size, e.g., plugs 12B-D, from being inserted into the incorrect receptacle, e.g., receptacle 12A.

[57] Specifically, Figure 21 illustrates a first 1x4 connector assembly 10A having a first plug 12A and a first receptacle 14A. The first plug has two keying ribs 140 formed at the top and bottom of the second side wall 28 and a gap or slot 144 formed between the keying ribs 140. The first receptacle 14A has keying slots 146 formed at the top and bottom of its second side wall 37. When the first plug 12A is inserted into the first receptacle 14A in the proper orientation, the keying ribs 140 on the plug fit into the keying slots 146 in the receptacle. Conversely, if an attempt is made to insert the first plug 12A in the wrong orientation, e.g. upside-down, the keying ribs 140 on the first plug 12 abut against the latching protrusions 60, 62 in the first receptacle 14B, and the latch mechanism 48 abuts against the keying rib 142 on the second sidewall 37 of the receptacle 14A, thereby preventing insertion of the plug 12A into the receptacle 12B.

[58] Figure 22 illustrates a second 1x4 connector assembly 10B having a second plug 12B and a second receptacle 14B. The second plug 14B has a single keying rib 140 formed at the bottom of its second sidewall, while the second receptacle 14B has a reciprocal keying slot 146 formed at the bottom of its second side wall. When the plug 12B is inserted into the receptacle 14B in the correct orientation, the keying rib 140 on the plug 12B fits into the keying slot 146 in the receptacle. Conversely, if an attempt is made to insert the plug 12B in the wrong orientation, e.g. upside-down, the keying rib 140 on the second plug 12B abuts against the latching protrusions 60, 62 in the receptacle 12B and the latching mechanism 48 abuts against the rib 142 in the second sidewall of the receptacle 12B, thereby preventing insertion of the plug 12A into the receptacle 14B. As can be seen in the drawings, the bottom keying rib 140 of the second plug 12B is larger

than the bottom keying rib 140 on the first plug 12A (and also the bottom keying slot 146) on the first receptacle 14A.

[59] Figure 23 illustrates a third 1x4 connector assembly 10C having a third plug 12C and a third receptacle 14C. The third plug 12C includes two keying ribs 140 formed at the bottom and middle of its second sidewall. The third receptacle 14C has reciprocal keying slots 146 formed at the bottom and middle of its second side wall. When the third plug 12C is inserted into the third receptacle 14C in the proper orientation, the keying ribs 140 on the plug fit into the keying slots 146 in the receptacle. Conversely, if an attempt is made to insert the third plug in the wrong orientation, e.g. upside-down, the keying ribs 140 on the third plug 12C abut against the latching protrusions 60, 62 in the third receptacle 14C, and the latching mechanism 48 abuts against second sidewall 28 of the receptacle.

[60] Figure 24 illustrates a fourth 1x4 connector assembly 10D having a fourth plug 12D and a fourth receptacle 14D. The first keying feature of the fourth plug 14D includes a pair of keying ribs 140 formed at the bottom and upper middle, e.g. between the center and top, of the plug's second sidewall. The fourth receptacle 14D has reciprocal keying slots 146 formed at the bottom and upper middle of its second side wall. When the fourth plug 12D is inserted into the fourth receptacle 14D in the proper orientation, the keying ribs 140 on the fourth plug 12D slide into the keying slots 146 in the fourth receptacle 14D. Conversely, if an attempt is made to insert the fourth plug 12D in the wrong orientation, the keying ribs 14 on the fourth plug 12D abut against the latching protrusions 60, 62 in the fourth receptacle 14D, and the latching mechanism 48 abuts against the second sidewall of the fourth receptacle 14D.

[61] As was discussed above, in addition to ensuring that the plugs 12A-12D and receptacles 14A-14D are mated in the correct orientation, the first keying feature also prevents plugs of the same size from being inserted into the incorrect receptacle. For example, if an attempt is made to mate the first plug 12A with the second receptacle 14B, the top keying rib 140 on the first plug 12A will abut the rib 142 in the second receptacle 14B.

[62] As can be seen in Figures 4-6 and 21-24, the second keying feature consists of reciprocal keying ribs 148 and slots 150 formed on the bottom walls of the plug 12 and receptacle 14. The second keying feature is identical on all of the plugs and receptacles of a given size. For example, in Figures 21-24, each of the 1x4 plugs includes a bottom keying slot 148 defined by the longitudinal slot 114 in the TPA 80. The keying slot 148 is configured to align and mate with a reciprocal keying rib 148 formed in the bottom wall of the receptacle. The lateral space 152 between the first latching protrusion 116 and the leg 108 of the TPA 80 defines a reduced width keying slot that receives the front end of the keying rib 148 when the plug and receptacle are fully mated. (See Figure 6). It will be appreciated, that the keying rib 148 could have an increased width rear portion (not shown) of approximately the same width as the longitudinal slot 114. The receptacle 14 may also include ribs 156 formed along the first side wall of the receptacle. The ribs 156 are located inwardly of the latching protrusion 60, 62 and are sized to fit in the gaps above and below the latching beam when the plug 12 is inserted into the receptacle 14. The ribs 156 help to guide the plug 12 into the receptacle 14 and facilitate correct mating of the receptacle pins 38 into the plug's terminals 40.

[63] In applications that have connector assemblies of different sizes, the second keying feature is used to prevent smaller plugs, e.g. a 1x4 plug, from being inserted into a larger receptacle, e.g. a 1x6 receptacle. This is illustrated in Figures 25 and 26. Figure 25 is a cross-sectional view illustrating a 1x6 plug 212 correctly mated with a 1x6 receptacle 214. The second keying feature in the 1x6 plug 212 consists of first and second keying slots 150a, 150b formed in the bottom of the plug. One of the keying slots 150a is defined by the longitudinally extending slot 114 in the TPA 80, in the same manner as was discussed above. The other keying slot 150b is shown as being formed directly in the bottom wall of the plug housing. As will be appreciated, a portion of the slot is also defined by the front wall of the TPA. The 1x6 receptacle 214 includes reciprocal first and second keying ribs 148a, 148b in its bottom wall. The keying ribs 148a, 148b are sized and positioned to mate with the first and second keying slots 150a, 150b in the plug 212 when the plug is inserted into the receptacle. However, when, as is shown in Figure 26, an attempt is made to insert a smaller plug, e.g. a 1x4 plug 12B, into the 1x6 receptacle the second rib 148b on the receptacle abuts against the bottom keying rib 140 on the

plug's second side wall, thereby preventing the plug from being inserted into the receptacle. In Figure 26, the interference between the ribs 140, 148b is shown by the double crosshatch 225.

[64] While the invention has been described with reference to a preferred embodiment, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from its scope. Therefore, it is intended that the invention not be limited to the particular embodiment disclosed, but that the invention will include all embodiments falling within the scope of the appended claims.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2

CLAIMS

1. An electrical connector assembly comprising:
a plug having front and rear ends, the front end including a mating interface;
a receptacle having an opening configured to receive the mating interface of the plug;
a deflectable latch including a beam having a front end secured with the front end of the plug housing and a rear, free-standing end which is biasable towards the plug to permit the plug and receptacle to be mated with one another, the latch further including first and second latching projections extending from opposite sides of the beam; and
first and second latch mating elements formed within the receptacle opening, the first and second latch mating elements being positioned to securely engage the first and second latching projections when the plug and receptacle housings are fully mated with one another.
2. A connector assembly as set forth in claim 1, wherein the plug includes a cut out portion underlying the rear end of the latch beam for permitting increased inward deflection of the latch beam relative to the plug.
3. A connector assembly as set forth in claim 1, wherein the rear end of the latch beam includes a beveled inner face for permitting increased inward deflection of the latch beam relative to the plug.
4. A connector assembly as set forth in claim 1, wherein the first and second latching projections are longitudinally aligned with one another along the length of the latch beam.
5. A connector assembly as set forth in claim 1, wherein the plug includes a housing having a top wall, a bottom wall and first and second side walls, at least a portion of the top, bottom and side walls defining the mating interface, the latch being disposed along one of the first and second side walls, and wherein the overall height of the latch, as

measured between the outer edges of the first and second latching projections, is substantially the same as the height of the mating interface side walls.

6. A connector assembly as set forth in claim 5, further comprising:
a plug keying feature formed along the side wall of the plug housing opposite the latch; and
a receptacle keying feature formed within the receptacle opening for mating with the plug keying feature.

7. A connector assembly as set forth in claim 6, wherein the plug further comprises a terminal position assurance device (TPA) configured to mate with the plug housing, the TPA having a front wall and top and bottom opposed latching members extending from the front wall and being configured to engage with the mating interface for securing the TPA to the mating interface, one of the top and bottom latching members defining a second plug keying feature configured to mate with a second receptacle keying feature formed in the receptacle opening.

8. A connector assembly as set forth in claim 7, wherein the second plug keying feature comprises a longitudinal slot formed in one of the top and bottom latching members of the TPA.

9. A connector assembly as set forth in claim 8, further comprising first and second latching protrusions extending from the plug housing, the first latching protrusion being positioned to mate with the longitudinal slot to maintain the TPA in a preset position and the second latching protrusion being positioned to mate with the longitudinal slot to maintain the TPA in a fully engaged position.

10. An electrical connector system comprising:
a first plug having a mating interface;
a receptacle having an opening configured to receive the mating interface of the first plug housing;

a second plug having a mating interface sized to mate with the receptacle opening;
a third plug having a mating interface which is smaller than the receptacle opening
and therefore normally insertable into the receptacle opening;

first and second plug keying features formed on the mating interface of the first plug; and

first and second keying receptacle features formed within receptacle opening for mating with the first and second keying of the first plug, respectively, the first receptacle keying feature being configured to prevent the mating interface of the second plug from being fully inserted into the receptacle opening, and the second receptacle keying feature being configured to prevent the mating interface of the third plug from being fully inserted into the receptacle opening.

11. A connector assembly as set forth in claim 10,

wherein the first plug includes a housing having front and rear ends, the front end including a top wall, a bottom wall, and first and second side walls, at least a portion of the top, bottom, and side walls defining the mating interface of the first plug; and

wherein the connector assembly further comprises a deflectable latch formed along the first side wall of the first plug housing, the latch being adapted to engage with a reciprocal latching feature of the receptacle when the mating interface of the first plug is inserted into the receptacle opening; and

wherein one of the first and second plug keying features is formed on the second side wall of the first plug housing and the other of the first and second plug keying features is formed on one of the top and bottom walls of the first plug housing.

12. A connector assembly as set forth in claim 11, further comprising a terminal position assurance device (TPA) configured to mate with the front end of the first plug housing, the TPA having a front wall and top and bottom opposed latching members extending from the front wall and being configured to engage with the first plug housing for securing the TPA to the first plug housing, and wherein one of the first and second keying features comprises a longitudinal slot formed in one of the top and bottom latching members of the TPA.

13. A connector assembly as set forth in claim 12, wherein one of the first and second keying features is formed in the bottom latching member of the TPA, and wherein the bottom wall of the plug housing includes a longitudinally extending recess positioned to receive the bottom latching member of the TPA.

14. A connector assembly as set forth in claim 12, further comprising first and second latching protrusions extending from the first plug housing, the first latching protrusion being configured to mate with the longitudinal slot to maintain the TPA in a preset position and the second latching feature being configured to mate with the longitudinal slot to maintain the TPA in a fully engaged position.

15. A reduced envelope electrical connector housing assembly comprising:

- a first plug including a housing having a front and rear ends, the front end including a top wall, a bottom wall, and first and second side walls, at least a portion of the top, bottom, and side walls defining a mating interface;
- a receptacle having an opening configured to receive the mating interface of the plug housing;
- a second plug having a mating interface sized to mate with the receptacle opening;
- a third plug having a mating interface which is smaller than the receptacle opening and therefore normally insertable into the receptacle opening;
- a deflectable latch formed along the first side wall of the first plug housing;
- at least one latch mating element formed within the opening in the receptacle, the latch mating element being positioned to securely engage the latch when the first plug and the receptacle are fully mated with one another;
- a first plug keying feature formed on the second side wall of the first plug housing;
- a first receptacle keying feature formed within the receptacle opening for mating with the first plug keying feature when the mating interface of the first plug housing is inserted into the receptacle opening;

a second plug keying feature formed on one of the top and bottom walls of the first plug housing;

a second receptacle keying feature formed within the receptacle opening for mating with the second plug keying feature when the mating interface of the first plug is inserted into the receptacle opening; and

wherein one of the first and second receptacle keying features is configured to prevent the mating interface of the second plug from being fully inserted into the receptacle opening, and the other of the first and second receptacle keying features is configured to prevent the mating interface of the third plug from being fully inserted into the receptacle opening.

16. In an electrical connector system having a first plug having a mating interface, a receptacle having an opening configured to receive the mating interface of the first plug housing, a second plug having a mating interface sized to mate with the receptacle opening and a third plug having a mating interface which is smaller than the receptacle opening and therefore normally insertable into the receptacle opening, a method for preventing the second and third plugs from being mated with the receptacle, comprising:

providing first and second plug keying features on the first plug; and

providing first and second receptacle keying features on the receptacle for mating with the first and second keying of the first plug, respectively, the first receptacle keying feature being configured to prevent the mating interface of the second plug from being fully inserted into the receptacle opening, and the second receptacle keying feature being configured to prevent the mating interface of the third plug from being fully inserted into the receptacle opening.

ABSTRACT OF THE DISCLOSURE

[65] An electrical connector assembly includes a plug having front end including a mating interface and a receptacle having an opening configured to receive the mating interface of the plug. A deflectable latch includes a beam having a front end secured with the front end of the plug housing and a rear, free-standing end which is biasable towards the plug to permit the plug and receptacle to be mated with one another. The latch includes first and second latching projections extending from opposite sides of the beam. First and second latch mating elements are positioned within the receptacle opening to securely engage the first and second latching projections when the plug and receptacle housings are fully mated with one another. The plug and receptacle include first and second mating keying features. One of the keying features is configured to prevent other plugs with mating interfaces of the same size from being inserted into the receptacle. The other keying feature being configured to prevent smaller plugs from being inserted into the receptacle. The overall envelope of the plug's mating interface is reduced by defining one of the keying features in a side wall of the plug opposite that of the latch, while defining the other keying feature in one of the top and bottom walls of the mating interface.

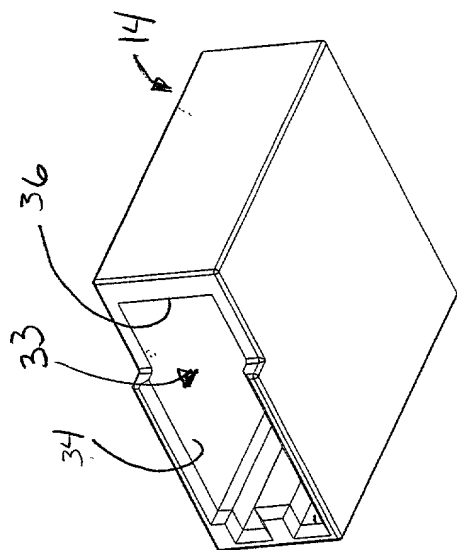
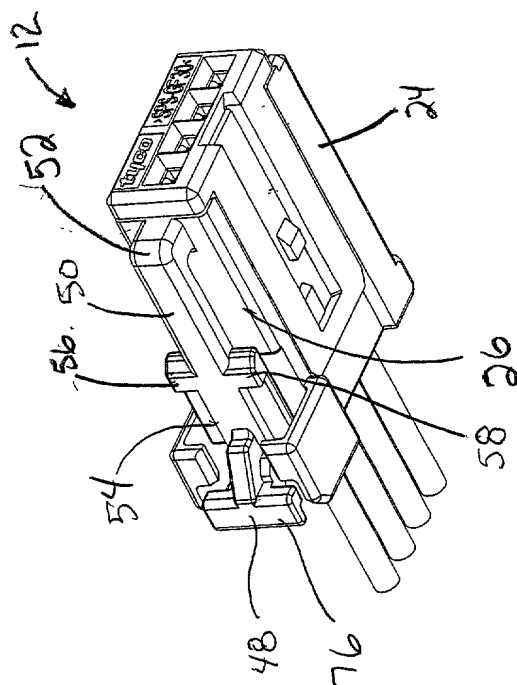


FIG. 2



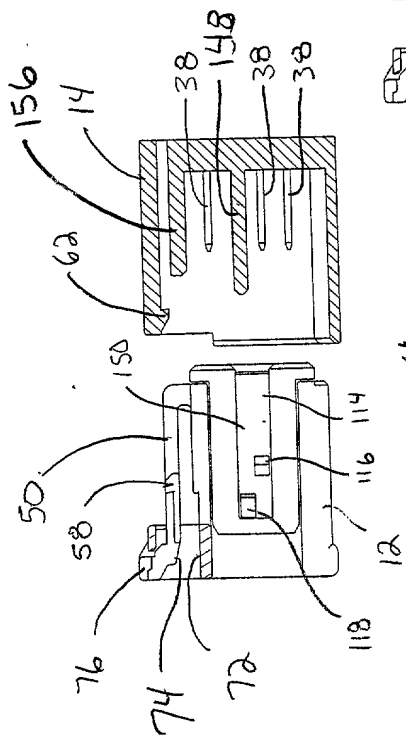


FIG 4

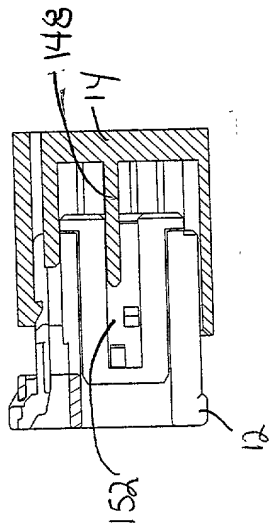


FIG 5

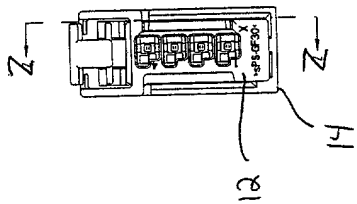


FIG 3

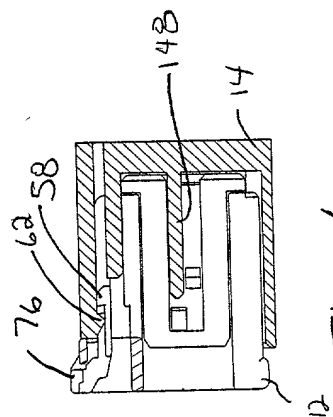
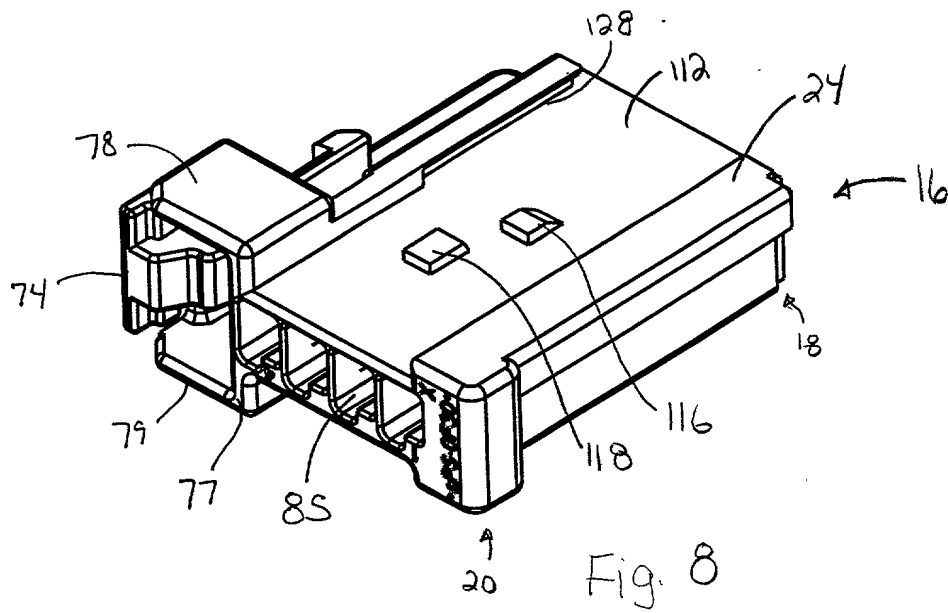
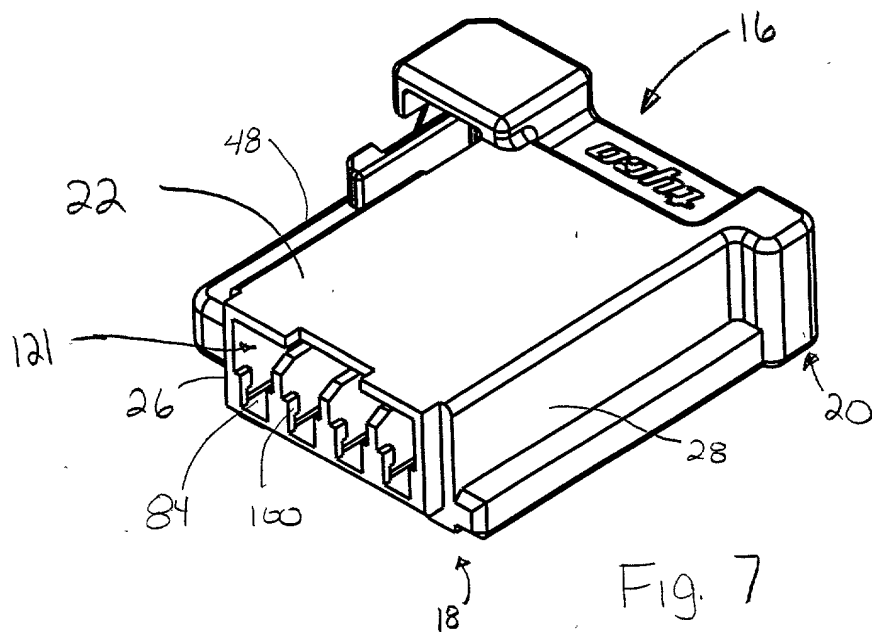


FIG 6



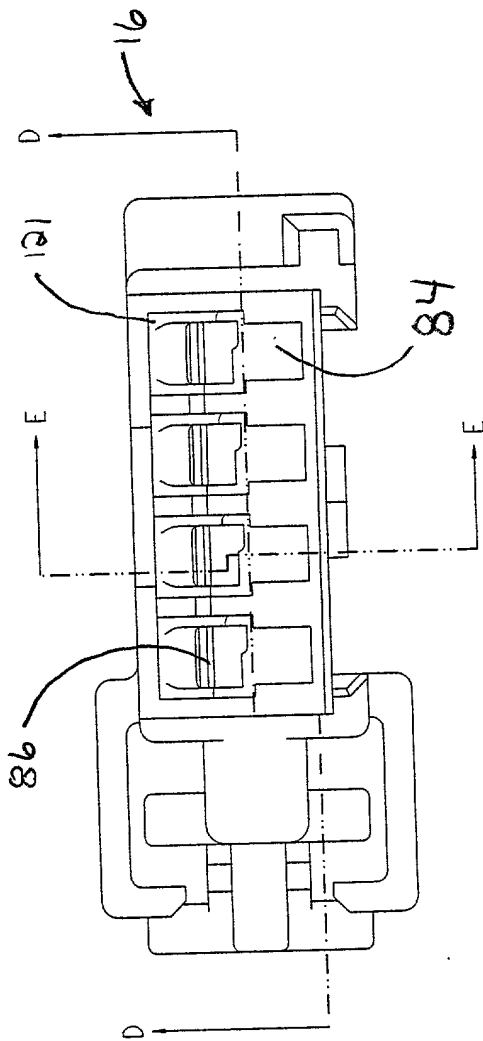


Fig. 9

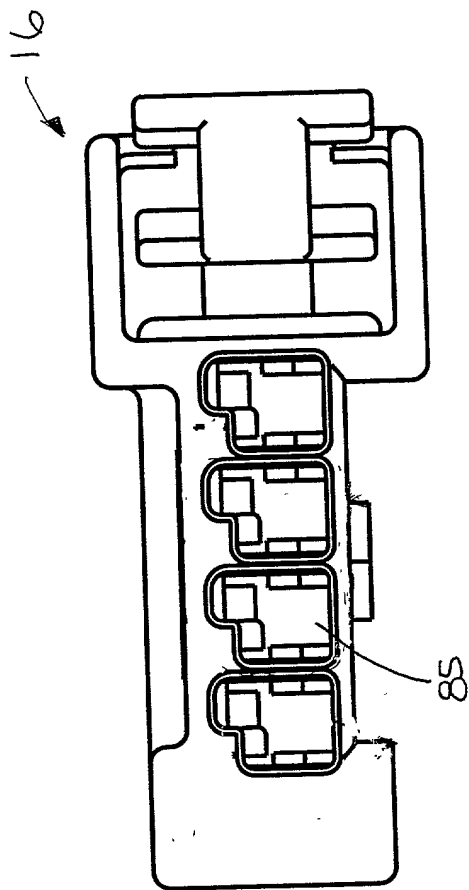


Fig. 10

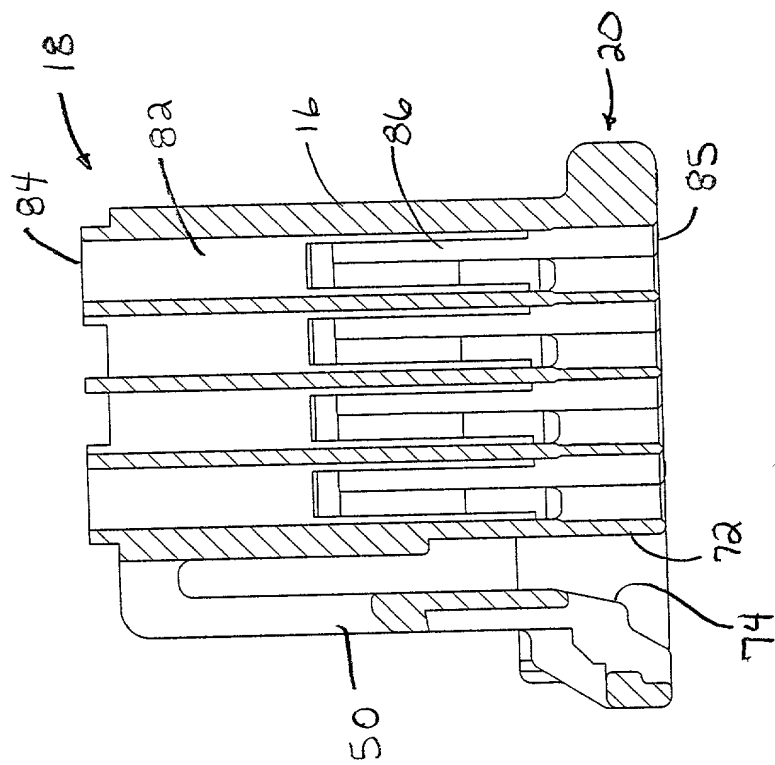


FIG. 11

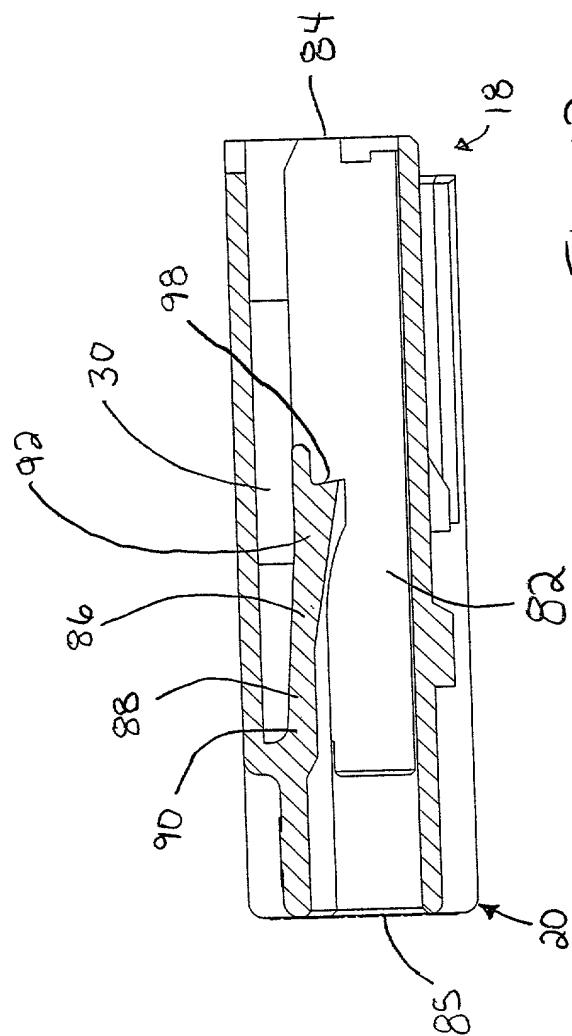


FIG. 12

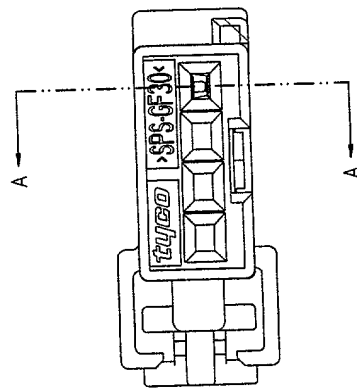


FIG. 13

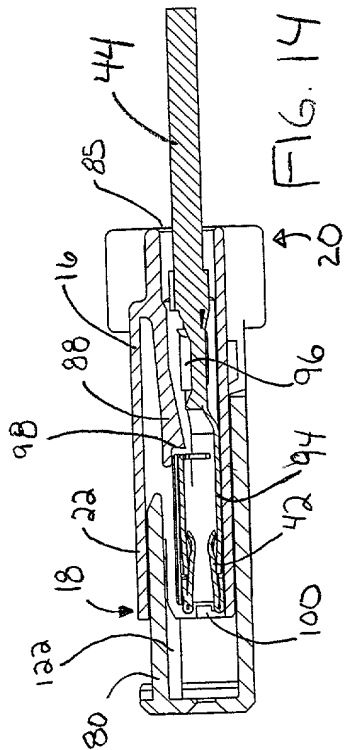


FIG. 14

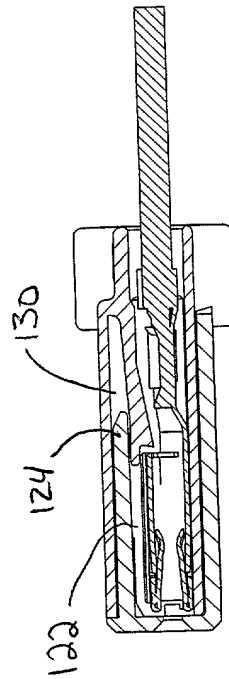


FIG. 15

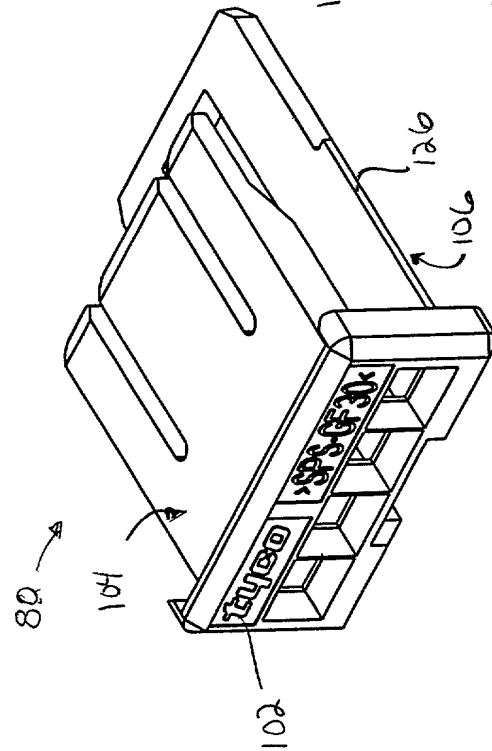


Fig. 16

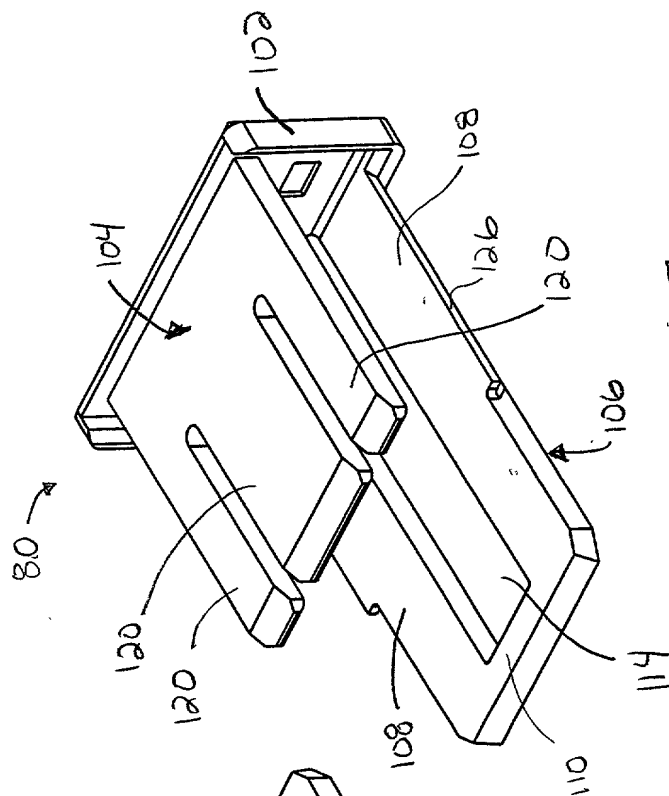


Fig. 17

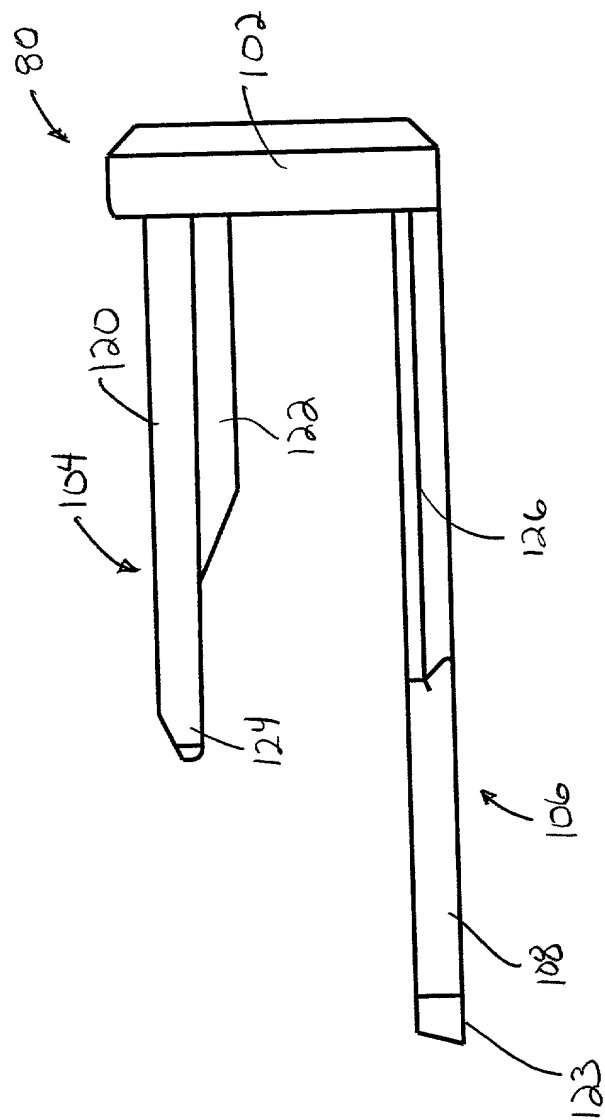
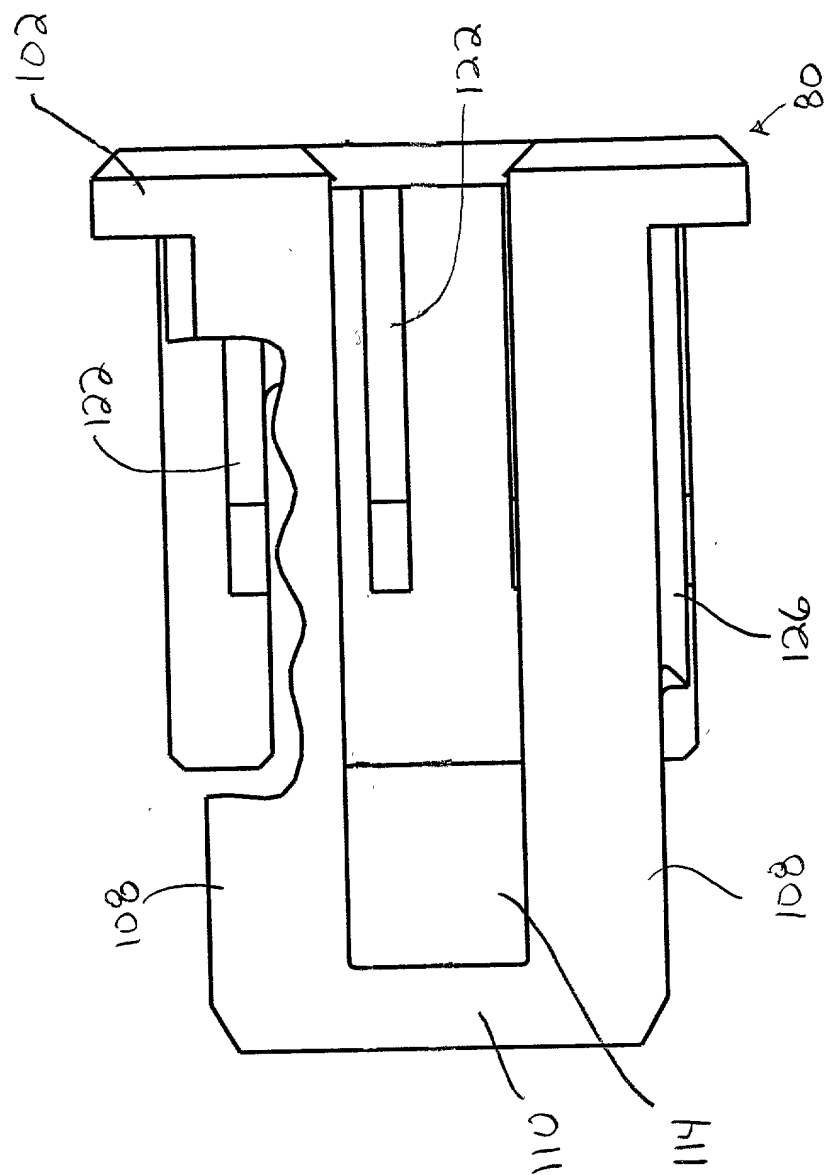


Fig. 18

Fig. 19



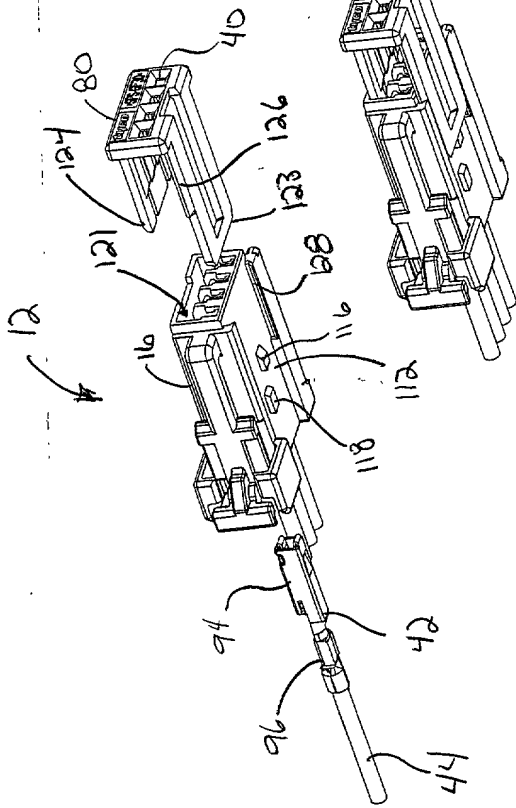


FIG 20A

FIG 20B

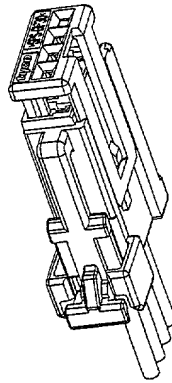


FIG 20C

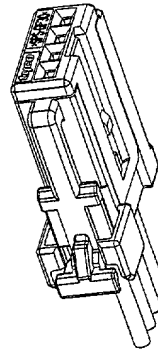


FIG 20D

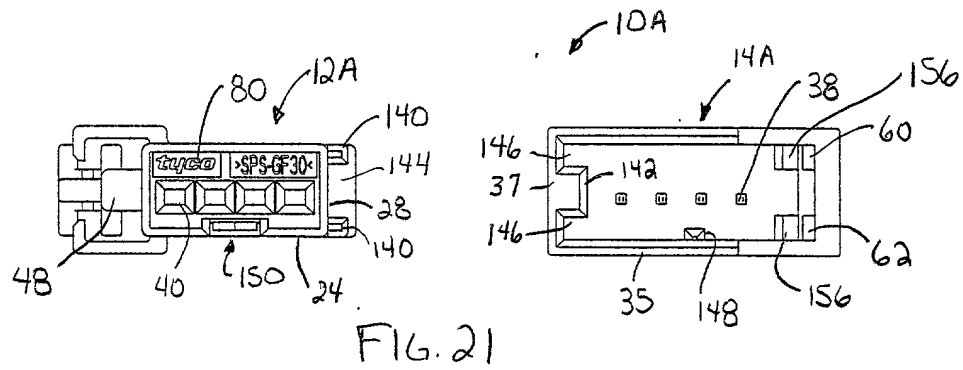


FIG. 21

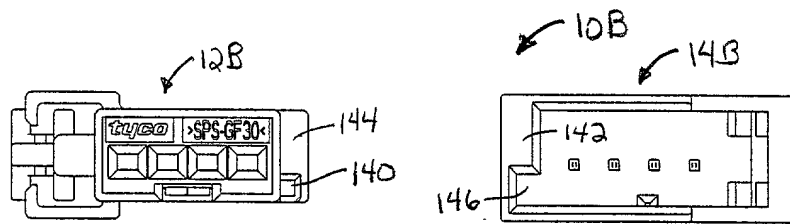


FIG. 22

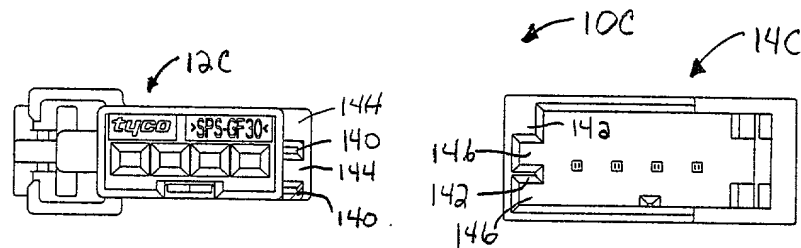


FIG. 23

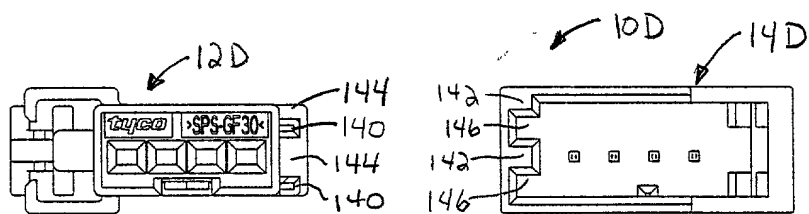


FIG. 24

